

μ

8


μ : μ web
 μ μ Web Server, LDAP
 Server Mail Server.
 μ μ
 μ μ php
 μ μ Web Server,
 LDAP Server Mail Server (2). ,
 Ubuntu Linux

μ μ .

- μ :

1. μ phpldapadmin.
 - 1.1. entry “dc=corelab”
 «Organization Unit» μ μ «people».
 - 1.2. μ slapcat.
 - 1.3. entry “ou=people, dc=corelab”
 «SimpleSecurityObject» μ μ «nikos» password
 «nikos».
 - 1.4. μ slapcat.
 LDAP schema 1.
2. configuration site cnms1.com
 μ μ
 .htaccess.
3. index.html cnms1.com
 /cnms1.com/public/

- 3.1. μ username μ password. μ
- 3.2. μ μ «Reset» «Submit»
- 3.3. μ ldap.php μ . post

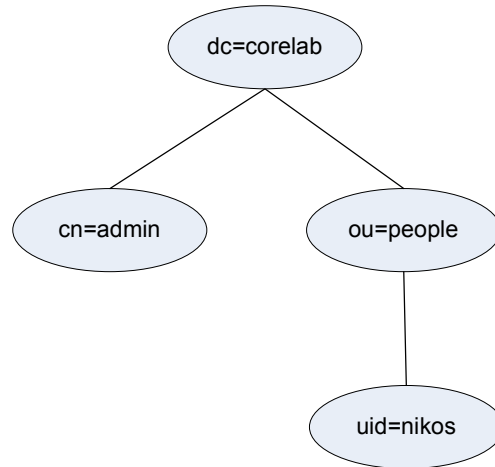


1: LDAP Schema

4. μ index.html o ldap.php μ
- 4.1. To ldap.php μ username password index.html. ,
- LDAP Server DN: ou=people, dc=corelab (uid=username) μ
- μ username password. μ , Email
- 4.2. μ μ μ μ μ ,
- μ User Administrator ,
- μ submit. μ μ μ
- LDAP μ μ .
- 4.3. contact.php
- μ μ post.
5. attribute LDAP entry “uid=nikos, ou=people, dc=corelab” μ μ «description» μ ldap.php, «Nikos Papadopoulos».
- description μ .
6. μ o contact.php μ
- index.html
- 6.1. To contact.php μ (μ , email, μ μ ,) ldap.php. SMTP Server

emails (

email

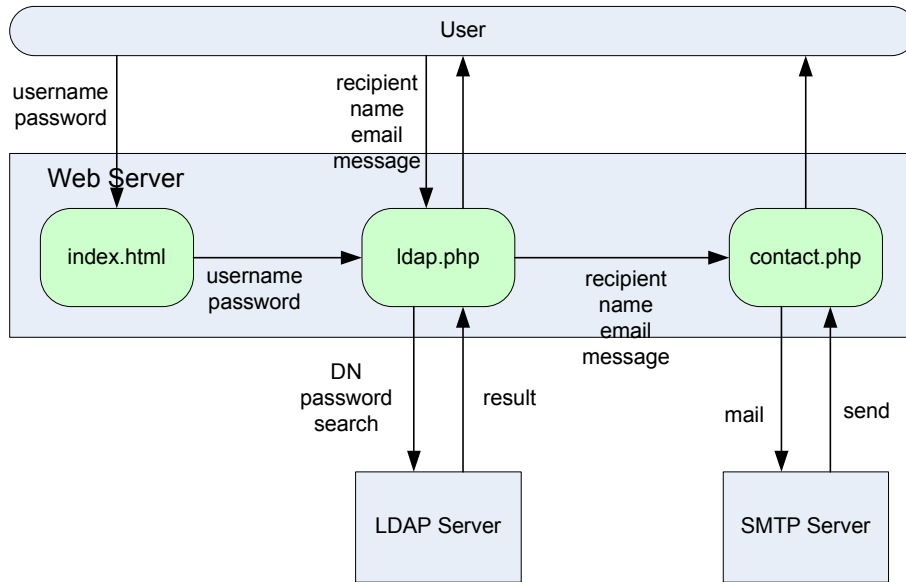

2:

μ

- 1. <http://gr.php.net/ldap>
- 2. <http://gr.php.net/imap>

:

μ

μ

μ

μ

μ

.